


TWIN TRACK 66

TECHNICAL SPECIFICATIONS



PHYSICAL CHARACTERISTICS		
Frame	Steel	
Cabinet	Aluminum	
Length	65 In	1651 mm
Width	30 In	762 mm
Height	13 3/4 In	349 mm
Weight	820 lbs	372 kg
Ground clearance	2 1/8 In	54 mm
Turning diameter	70 In	1778 mm
Load bearing capacity (INCLINED SURFACE)	1100 lbs at 40°	500 kg at 40°
Load bearing capacity (ON STAIRS)	1100 lbs at 40°	500 kg at 40°
Load bearing capacity (FLAT SURFACE)	2200 lbs	1000 kg
Max. speed (FLAT SURFACE)	44 ft/mIn	13.4 m/mIn

POWER	
Motor power	1 HP (x2)
Gearbox ratio	100:1 (x2)
POWER FEATURES	
Batterles Amperage/Voltage	85 Amps at 12 volts (x2)
Charger	Integrated AC-DC (x1)
Battery Pack Amperage	85 Amps
Operating voltage	24 VDC
Continous Run-time	1.5 hours approx. (WITHOUT LOAD, FLAT SURFACE)
Battery Recharging Time	5.5 hours approx.

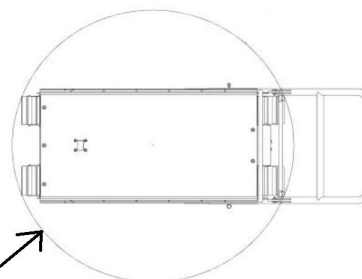

TT-66 TURNING CIRCLE: 70"